

BATTERIES



LIFELINE AGM MARINE BATTERY BENEFITS

User Safety, Sealed construction, Non-spill

Maintenance free, No adding water or repairing corroded terminals
Exceptionally Fast recharge, No current limitations with voltage regulated recharging

Deep Cycle, Thick positive plates to provide real deep cycle performance

Outstanding cranking performance - Aircraft class cell construction lowers internal resistance

Best charge retention (especially against flooded cell types)

Lowest discharge rates - Less than 3 percent per month unattended

Easily shipped - Even via UPS except GPL-8D and GPLAD because of weight

Shock and vibration resistant - 100% of plates are covered with separator liners

Properly supported

LIFELINE AGM batteries with absorbed electrolyte can be installed and operated on their side.

Terminals:

GPL-24T, GPL27T & GPL-31T are heavy-duty copper alloy Marine Terminals.


All 'T' batteries supplied with brass bolts and washers.

The GPL-U1T is a 1/4" -20 N.C. copper alloy threaded insert.

A= Automotive post.

L= L bladed terminal 5/16" bolt hole and supplied with bolts and washers.

Handles: "T" models have handles built into the cover. GPL-24T and GPL-27T also incorporate strap handles. Handles not available on part numbers GPL-4C. Models GPL-4D & GPL-8D are equipped with rope handles.

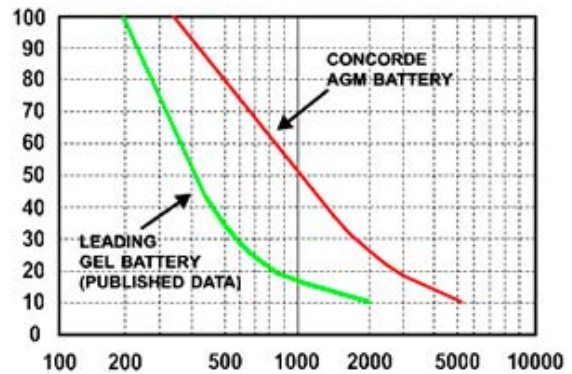

LIFELINE START BATTERIES

| Code | Volts | Dimensions (mm) | | | Weight Kg | CCA (0° C) | Capacity Amp Hours |
|-----------|-------|-----------------|-----|-----|--------------|---------------|--------------------------|
| | | L | W | H | | | |
| GPL-1400T | 12 | 249 | 132 | 174 | 14.5 | 550 | 57 |
| GPL-2400T | 12 | 283 | 172 | 235 | 24.1 | 650 | 75 |
| GPL-2700T | 12 | 333 | 172 | 235 | 28.6 | 755 | 95 |
| GPL-3100T | 12 | 328 | 172 | 236 | 30.4 | 810 | 100 |

Capacity ratings are stated at 77OF (25 OC) to 1.75 volts per cell.



LIFELINE DEEP CYCLE BATTERIES

| Code | Volts | Dimensions (mm) | | | Weight Kg | CCA (0° C) | Capacity Amp Hours |
|---------|-------|-----------------|-----|-----|--------------|---------------|--------------------------|
| | | L | W | H | | | |
| GPL-U1 | 12 | 196 | 132 | 175 | 10.9 | 215 | 33 |
| GPL-24T | 12 | 283 | 172 | 235 | 25.5 | 550 | 80 |
| GPL-27T | 12 | 333 | 172 | 235 | 29.5 | 575 | 100 |
| GPL-31T | 12 | 328 | 172 | 236 | 31.4 | 600 | 105 |
| GPL-4DL | 12 | 527 | 222 | 266 | 61.2 | 1100 | 210 |
| GPL-8DL | 12 | 526 | 278 | 260 | 73.6 | 1350 | 255 |
| GPL-4C | 6 | 261 | 181 | 294 | 30.0 | 750 | 220 |

Capacity ratings are stated at 77OF (25 OC) to 1.75 volts per cell.

